

Constant Current LED Power Supply

FCC linear series

SLT80-350IL-EU



Product description:

This type of power supply is an exclusively designed stabilized power supply for LED lamp. With constant current (CC) technology, it is suitable for constant current lamps connected in a series. According to the switches selection, the output current can change from 200mA to 350mA. The current step is 10mA.

The built-in protection circuit will shut down the power supply in case of such faults as: open circuit, short circuit, over load or over temperature. The power supply will restart automatically after fault correction.

Standards:

EN61347-1
EN61347-2-13
EN61547
EN55015
EN61000-3-2
EN61000-3-3
EN62384
EN62493


Characteristics:

- Built-in power supply for constant current LED lamp
- Non-isolated Built-in design with functional ground, electric shock depend on the lamp
- Selectable output current according to the dipswitch from 200-350mA
- Push-in terminal block for quick connection with wire cross selection 0.5-0.75mm²
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- Life time: 50,000h (ta=50 °C)
- Warranty: 5 years


Specifications:

Model		SLT80-350IL-EU															
Output	turn on time(S)	≤0.5															
	output current(mA)	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350
	output current tolerance ^①	+/-5%															
	ripple current(mA) ^③	≤3%															
	working voltage range(V)	115-270	110-270									110-266	110-258	110-250	110-242	110-235	110-228
	Max. output voltage(V)	420V															
	dimming interface	No															
	dimming range	n/a															
Input	rated supply voltage(Vac)	220-240															
	voltage range(Vac)	198-264															
	line frequency(Hz)	50/60															
	input current(mA)	280	295	310	320	335	350	360	375	390	400	410		410	410	410	
	efficiency ^②	92.0%	92.0%	92.2%	92.5%	92.7%	92.8%	92.9%	93.1%	93.2%	93.4%	93.4%		93.3%	93.2%	93.1%	
	power factor ^②	0.90C															
	inrush current(lpk)	40A/140us															
Protection	over voltage protection	YES															
	short circuit protection	YES															
	over temperature protection	YES															
	automatic restart	YES															
	over load protection	YES															
	surge capacity	L-N: 1KV L,N-PE: 2KV															
Ambient and Life	Ta(℃)	-20...50															
	Tc max. (℃)	90															
	audible noise(dB)	20															
	Storage Temperature(℃)	-30...80															
	ambient humidity range	5%...85%RH, Not condensing															
	nominal life-time(hrs)	50'000@Tc															
Other	weight(g)	210															
	dimensions (LxWxH)(mm)	280x30x22															
	casing material	plastic															
	housing colour	grey															
	type of protection	IP20															
	protection class	Built-in															
Note	1.Tolerance : includes set up tolerance, line regulation and load regulation. 2.Tested at full load,230Vac.Refer to"Power Factor" and "EFFICIENT"curve graphs. 3.Output LF current ripple (< 200 Hz) 4.All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25 of ambient temperature. 5.The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.																



Dimensions(mm):

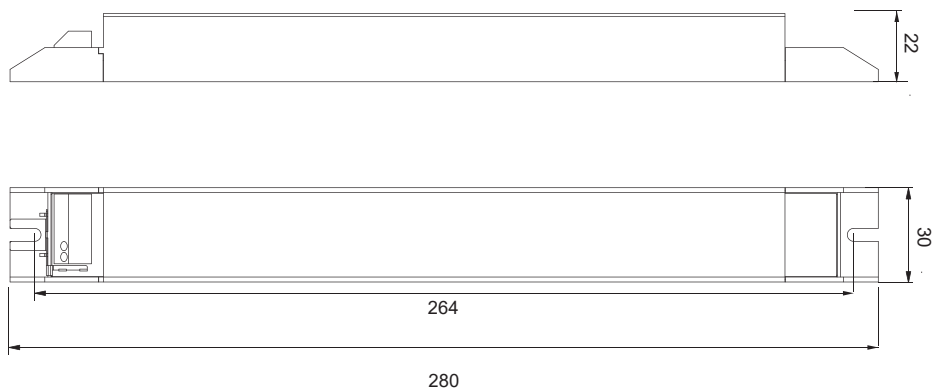

Wiring diagram:

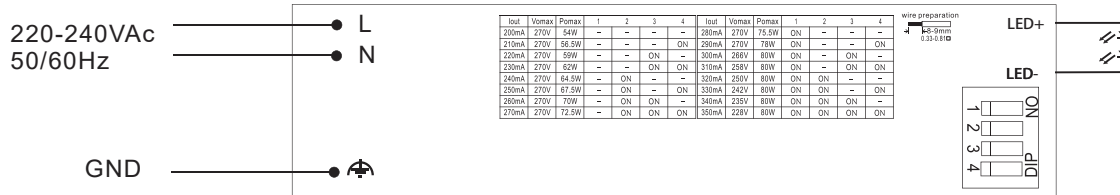

Electrical curves:

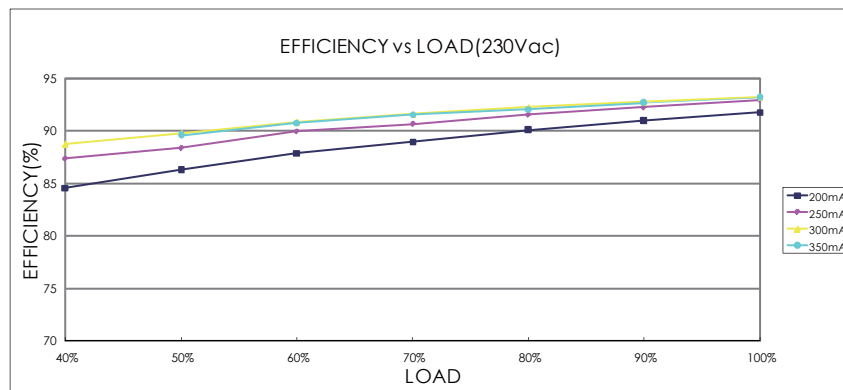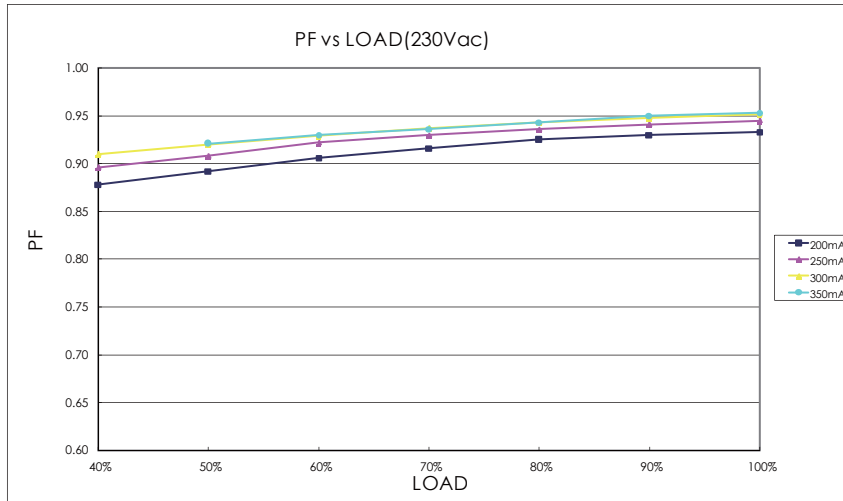

note

For constant current power supply, "LOAD" means the percentage of the maximum rated output voltage.
For constant voltage power supply, "LOAD" means the percentage of the maximum rated output current.

MCBS information:

Miniature circuit breaker Model	B10	B13	B16	B20	C10	C13	C16	C20
Model								
SLT80-350IL-EU	7	9	12	15	12	16	20	24

Order information:

Order.No.	Model	Carton quantity(pcs)	Carton dimension(mm)	G.W./CTN(kg)
1001-660312-0130	SLT80-350IL-EU	50	380x310x165	11.5

Sales & Technical Support:

SELF Electronics Co.,Ltd.(Headquarters)

Add: No. 1345 JuXian Road, Ningbo Hi Tech Park, Ningbo, China 315103
 Phone: +86-574-2880-5765, +86-574-2880-5658 (for English assistance)
 +86-574-2880-5678 (for Chinese assistance)
 Fax: +86-574-28805656
 E-mail: sales@self-electronics.com
<http://www.self-electronics.com>

SELF Electronics Co.,Ltd.,Shenzhen Office

Add: Room2007, Xinglang Xuan, Xinghemingju, Fuming Rd.,
 Futian District, Shenzhen
 Tel: +86-755-8355-8850
 Fax: +86-755-8355-8840
 E-mail: szsales@self-electronics.com

SELF Electronics Germany GmbH

August-Horch-Str. 7, 51149 Cologne
 Phone: +492203-18501-0
 Fax: 492203-18501-199
 E-mail: saleseu@self-electronics.com