



400W Single Output Switching Power Supply

ERPF-400 series

User's Manual



IS 13252(Part 1)/
IEC 60950-1
8
R-41070483
(for 12,24 only)



■ Features

- Universal AC input / Full range
(Withstand 300VAC surge input for 5 seconds)
- Built-in active PFC function
- High efficiency up to 91%
- Design against rain splash
- Protections: Short circuit / Overload / Over voltage/
Over temperature
- Cooling by free air convection
- LED indicator for power on
- Low cost, high reliability
- 100% full load burn-in test
- 3 years warranty

■ Applications

- LED strip lighting
- LED channel letters
- LED display

■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

ERPF-400 series is a 400W single output enclosed type AC/DC power supply with the active PFC design. It adopts an aluminum case and the interior is semi-potted, protecting the internal electronic components from rain splash and dust. With the complete protection functions, ERPF-400 is suitable for the applications such as outdoor LED channel letters, billboard, commercial display, etc.

■ Model Encoding

ERPF - 400 - 24

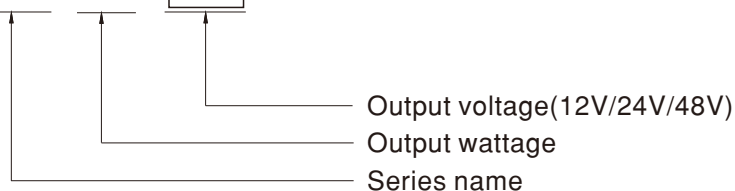



400W Single Output Switching Power Supply


ERPF-400 series

SPECIFICATION

MODEL		ERPF-400-12		ERPF-400-24		ERPF-400-48	
OUTPUT	DC VOLTAGE	12V		24V		48V	
	RATED CURRENT	30A		16.7A		8.3A	
	CURRENT RANGE Note.5	0 ~ 30A		0 ~ 16.7A		0 ~ 8.3A	
	RATED POWER	360W		400.8W		398.4W	
	RIPPLE & NOISE (max.) Note.2	150mVp-p		150mVp-p		240mVp-p	
	VOLTAGE ADJ. RANGE	10.8 ~ 13.2V		21.6 ~ 26.4V		43.2 ~ 52.8V	
	VOLTAGE TOLERANCE Note.3	±1.0%		±1.0%		±1.0%	
	LINE REGULATION	±0.5%		±0.5%		±0.5%	
	LOAD REGULATION	±0.5%		±0.5%		±0.5%	
	SETUP, RISE TIME	2000ms, 100ms/230VAC; 3000ms, 100ms/115VAC at full load					
	HOLD UP TIME (Typ.)	10ms/230VAC; 10ms/115VAC at full load					
INPUT	VOLTAGE RANGE Note.4	90 ~ 264VAC 127 ~ 370VDC					
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	PF≥0.95/230VAC, PF≥0.98/115VAC					
	EFFICIENCY (Typ.)	89%		90%		91%	
	AC CURRENT (Typ.)	2.5A/230VAC 3A/115VAC					
	INRUSH CURRENT (Typ.)	cold start 45A/115VAC, 90A/230VAC					
	LEAKAGE CURRENT	<1mA / 240VAC					
PROTECTION	OVER LOAD	105 ~ 135% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed					
	SHORT CIRCUIT	Protection type : Constant current limiting, recovers automatically after fault condition is removed					
	OVER VOLTAGE	13.8 ~ 16.2V		27.6 ~ 32.4V		55.2 ~ 64.8V	
		Protection type :Shut down O/P voltage, re-power on to recover					
	OVER TEMPERATURE	Shut down O/P voltage, recovers automatically after temperature goes down					
ENVIRONMENT	WORKING TEMP.	-30 ~ +60℃ (Refer to output load derating curve)					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-30 ~ +85℃, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.1%/℃ (0 ~ 35℃)					
	VIBRATION	10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC (Note.6)	SAFETY STANDARDS	UL60950-1,IEC/BS EN/EN62368-1, GB 4943.1, EAC TP TC 004, IS13252(Part1)(for 12,24 only) approved					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC / 25℃ / 70% RH					
	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) class A, GB17625.1,GB/T 9254.1; BS EN/EN61000-3-2; BS EN/EN61000-3-3, EAC TP TC 020					
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN55035; light industry level, EAC TP TC 020					
OTHERS	MTBF	1981.2K hrs min. Telcordia SR-332 (Bellcore) 233.4Khrs min. MIL-HDBK-217F (25℃)					
	DIMENSION	220.4*130*48mm (L*W*H)					
	PACKING	1.1Kg; 9pcs / 11Kg / 0.63CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Derating may be needed under low input voltages. Please check the static characteristics for more details. 5. Please refer to "Static Characteristics". 6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 450mm*450mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx						


Mechanical Specification

Case No.230 Unit:mm

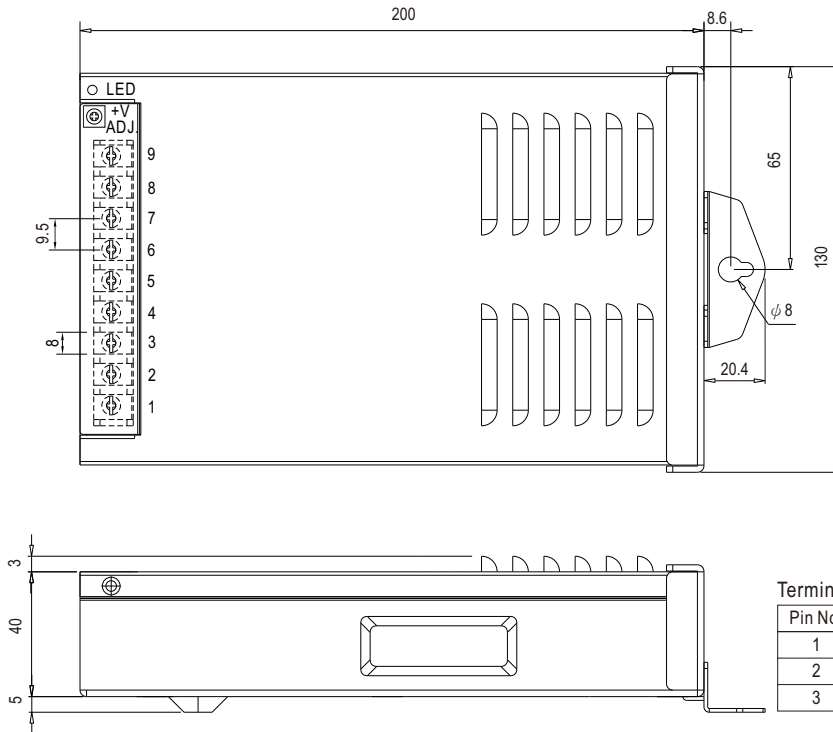


Block Diagram


fosc : 80KHz

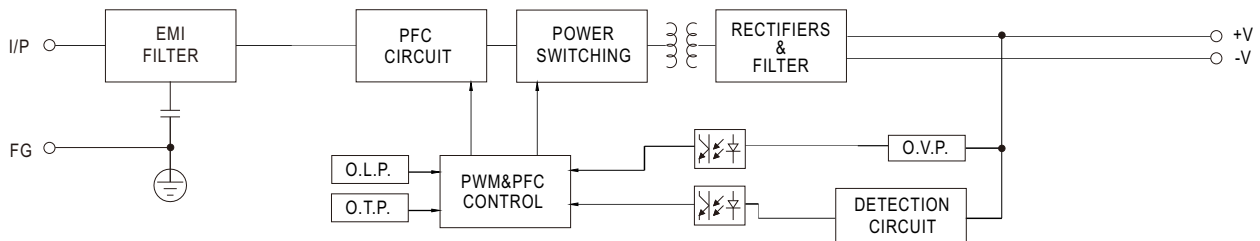

Derating Curve

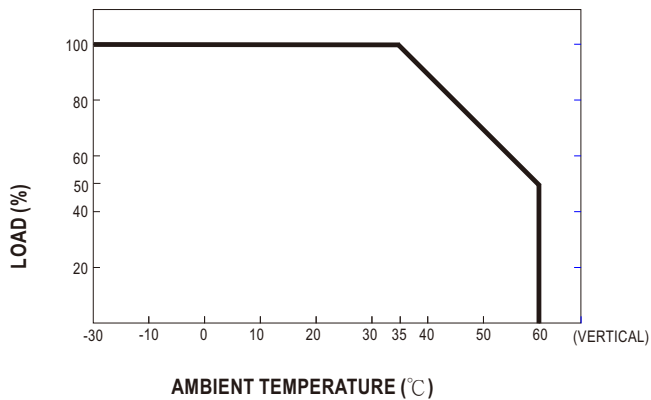


Static Characteristics

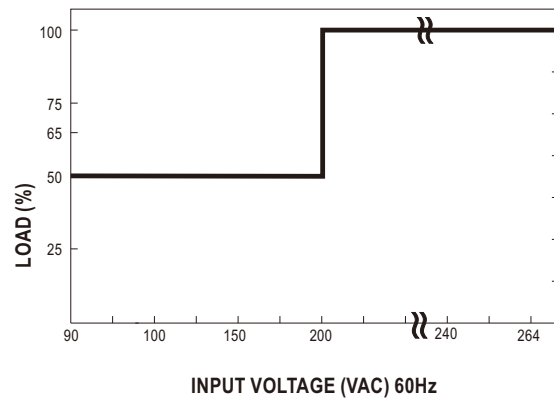

■ Installation

1. ERPF-400 should be installed in an upright position, leaning forward, backward or lay flat are not allowed



Correct installation method

2. For heat dissipation, distance of 10cm from 4 sides(up/down/right/left) and 5cm from the ventilation hole side should be kept, shown as below:

